U. S. DEPARTMENT OF LABOR IN REPLYING PLEASE REPER TO THIS

IMMIGRATION AND NATURALIZATION SERVICE Office of the Chief Patrol Inspector, Tucson, Arizona, October 30, 1940. 2316/1

Office of District Director
RECEIVED

District Director, Immigration & Naturalization Service, El Paso, Texas.

Your letter of Oct. 28, 1940, File 5002/175-A.


You are respectfully informed that the writer is of the opinion that outpost stations in this subdistrict should be established and buildings constructed at the following locations:

Slaughters Ranch (San Bernardino Ranch, Arizona)
Hereford, Arizona
San Rafael Valley station should be erected somewhere in
the vicinity of Lochiel, the exact site to be determined later, dependent upon ability to secure land
either by lease or purchase for this purpose.
Sasabe, Arizona
Sonoyta, Arizona

A patrol outpost station should be established somewhere between Presumido Pass and Managers Dam, the exact site to be determined later. It is believed that it will be necessary to secure permission or make some kind of an agreement with the U. S. Indian Service to establish this station, as this territory is in the Papago Indian Reservation.

There is enclosed herewith pencil sketch and description of what is believed would be suitable buildings for outpost stations. The sketch shows barns, corrals, etc.; however, it is only contemplated that horses will be used at Slaughters Ranch and at Hereford, Arizona. These two stations are the only ones where it would be necessary to erect corrals, barns, etc., as shown in the pencil sketch.

Chief Patrol Inspector.

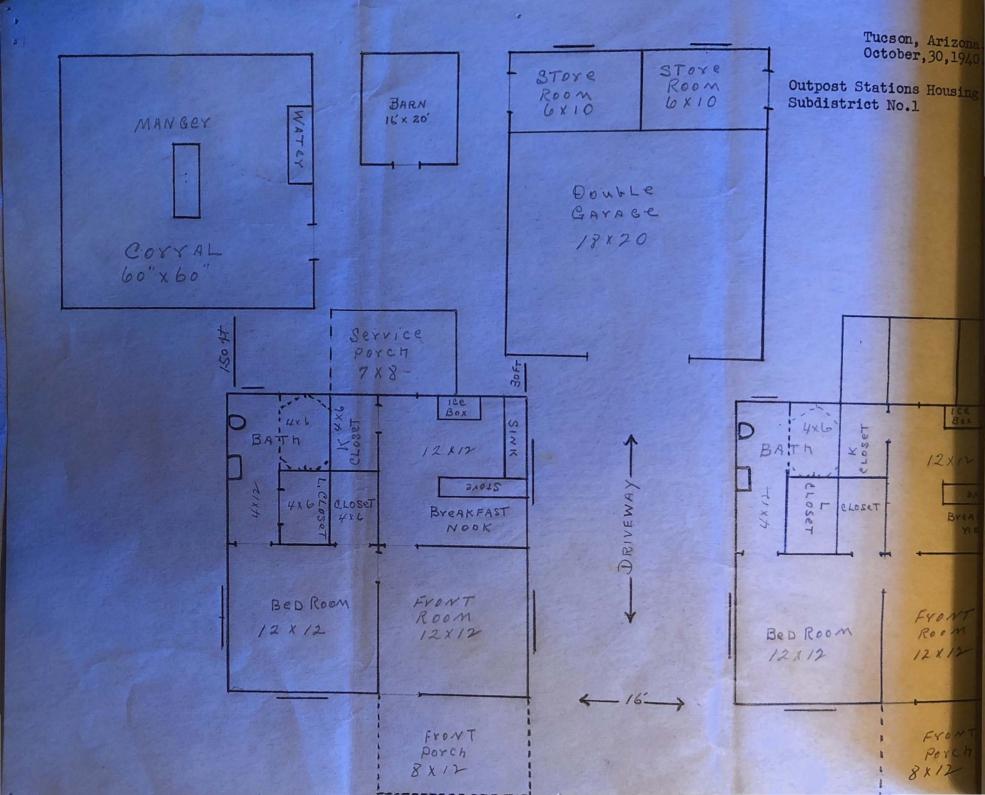

SUBJECT: Outpost stations, housing plan, Subdistrict No.1.
Tucson, Arizona. October, 30, 1940.

Each unit to consist of (2) two houses for the officers and their families, Double garage to house government vehicles. Store rooms to house Gov -t saddles and other equiptment, Barn to house grain and hay, and the corral for the keeping of government owned horses, construction to be-

HOUSES: Walls to be constructed of dobies, to have cement floors, pitched roof, insulated and covered with tile, door and window frames to be of steel, Service porch off kitchen to be roofed, floored and screened, Front porch to be a concrete slab not roofed. to be wired for electricity, small light plant installed, piped for water and sewerage connections, equiptment to be installed in houses for heating, cooking, and refrigeration, including hot water heater.

GARAGE: Walls to be constructed of debies, cement floors, pick roof covered with corrugated iron.

BARN: To be same construction as garage, with sliding door.

CORRAL: To be constructed of cedar posts, and (eight wire) slick galvanize wire, with cement watering trough and hay manager inside of corral, piped for water.

Each unit to be erected on one acre of ground enclosed by a six foot chain length fence. The cost per unit is estimated at \$7,500.00 (\$7,500.00)

200pis